


## NONFRIC® profillister för kedjor




simplex




duplex



simplex



duplex  
t.o.m. D513



duplex  
fr.o.m. D548

Standardlängd 2 meter. Special profillister tillverkas snabbt.

KEDJETEKNIK NONFRIC® profillist nr	För kedja		Mått					Vikt kg/m
	nr -	delning tum	B mm	H mm	b mm	h mm	e mm	
<b>455-T-10</b>	455	3/8"	15	10	5,4	1,5	-	0,13
<b>332-T-10</b>	332	1/2"x3/16"	15	10	4,5	1,5	-	0,13
<b>462-T-10</b>	462	1/2" (std)	20	10	7,4	2,2	-	0,18
<b>462-T-15</b>	462	1/2" (std)	20	15	7,4	2,2	-	0,26
<b>462-T-20</b>	462	1/2" (std)	20	20	7,4	2,2	-	0,34
<b>462-T-30</b>	462	1/2" (std)	20	30	7,4	2,2	-	0,55
<b>501-T-10</b>	501	5/8"	20	10	9,3	2,6	-	0,16
<b>501-T-15</b>	501	5/8"	20	15	9,3	2,6	-	0,25
<b>501-T-20</b>	501	5/8"	20	20	9,3	2,6	-	0,36
<b>501-T-30</b>	501	5/8"	20	30	9,3	2,6	-	0,55
<b>513-T-10</b>	513	3/4"	25	10	11,3	2,4	-	0,20
<b>513-T-15</b>	513	3/4"	25	15	11,3	2,4	-	0,32
<b>513-T-20</b>	513	3/4"	25	20	11,3	2,4	-	0,43
<b>513-T-30</b>	513	3/4"	25	30	11,3	2,4	-	0,69
<b>548-T-15</b>	548	1"	40	15	16,0	3,5	-	0,45
<b>548-T-20</b>	548	1"	40	20	16,0	3,5	-	0,68
<b>548-T-30</b>	548	1"	40	30	16,0	3,5	-	1,05
<b>563-T-15</b>	563	1 1/4"	45	15	18,0	4,2	-	0,55
<b>596-T-15</b>	596	1 1/2"	60	15	24,0	5,5	-	0,68
<b>613-T-20</b>	613	1 3/4"	75	20	30,0	6,8	-	1,15
<b>652-T-20</b>	652	2"	80	20	30,0	7,7	-	1,17
<b>Duplex</b>								
<b>D-455-T-10</b>	D 455	3/8"	25	10	5,3	1,5	15,6	0,20
<b>D-462-T-10</b>	D 462	1/2"	35	10	7,2	2,2	21,2	0,30
<b>D-462-T-15</b>	D 462	1/2"	35	15	7,2	2,2	21,2	0,45
<b>D-462-T-20</b>	D 462	1/2"	35	20	7,2	2,2	21,2	0,60
<b>D-462-T-30</b>	D 462	1/2"	35	30	7,2	2,2	21,2	0,92
<b>D-501-T-10</b>	D 501	5/8"	40	10	9,0	2,6	25,6	0,33
<b>D-513-T-10</b>	D 513	3/4"	45	10	10,9	2,4	30,4	0,37
<b>D-548-T-15</b>	D 548	1"	47,8	15	15,8	3,5	47,8	0,62
<b>D-563-T-15</b>	D 563	1 1/4"	54,7	15	18,2	4,2	54,7	0,70
<b>D-596-T-20</b>	D 596	1 1/2"	72,0	20	23,6	5,5	72,0	1,22
<b>D-613-T-25</b>	D 613	1 3/4"	88,4	25	28,8	6,8	88,4	1,75
<b>D-652-T-30</b>	D 652	2"	87,4	30	28,8	7,7	87,4	2,25

Anm. Reservation för ändrade mått.




## NONFRIC® profillister för kedjor




**TYP K**



**TYP U**

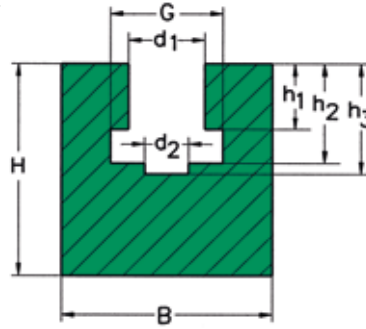

**TYP K**

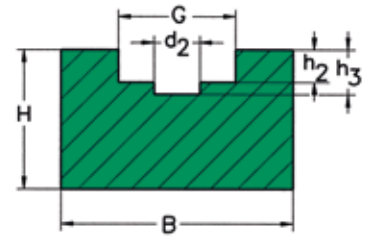

**TYP U**

Standardlängd 2 meter.

KEDJETEKNIK NONFRIC® profillist nr	För kedja		Mått								Vikt kg/m	
	nr	delning tum	B mm	H mm	h <sub>1</sub> mm	h <sub>2</sub> mm	h <sub>3</sub> mm	d <sub>2</sub> mm	d <sub>1</sub> mm	G mm		
<b>TYP K</b>												
<b>455 K-25</b>	455	3/8"	20	25	5,5	8,9	10,0	4	6,6	9,4	0,43	
<b>332 K-25</b>	332	1/2"x3/16"	20	25	4,5	8,0	9,5	4	8,0	10,8	0,42	
<b>462 K-30</b>	462	1/2" (std)	24	30	7,4	11,5	13,0	5	8,9	12,8	0,55	
<b>501 K-35</b>	501	5/8"	30	35	9,3	13,5	14,9	6	10,6	15,4	0,73	
<b>513 K-35</b>	513	3/4"	40	35	11,3	15,9	17,5	7	12,4	17,0	0,83	
<b>548 K-45</b>	548	1"	40	45	16,0	25,7	27,7	10	16,4	24,0	1,10	
<b>563 K-50</b>	563	1 1/4"	50	50	18,0	29,5	31,7	11	20,0	28,0	1,22	
<b>596 K-60</b>	596	1 1/2"	60	60	24,0	38,2	41,2	16	27,0	36,6	1,76	
<b>613 K-70</b>	613	1 3/4"	60	70	30,0	47,0	49,0	17	30,0	41,0	2,35	
<b>652 K-75</b>	652	2"	70	75	30,0	47,3	50,0	19	31,0	44,6	2,52	
<b>TYP U</b>												
<b>455 U-15</b>	455	3/8"	20	15	-	2,8	4,2	4	-	9,4	0,26	
<b>332 U-15</b>	332	1/2"x3/16"	20	15	-	2,3	3,8	5	-	10,8	0,25	
<b>462 U-15</b>	462	1/2" (std)	25	15	-	3,5	5,0	5	-	12,8	0,31	
<b>501 U-15</b>	501	5/8"	25	15	-	3,6	5,0	6	-	15,4	0,30	
<b>513 U-20</b>	513	3/4"	25	20	-	3,9	5,7	7	-	17,0	0,40	
<b>548 U-25</b>	548	1"	33	25	-	8,4	10,6	10	-	24,0	0,60	
<b>563 U-25</b>	563	1 1/4"	55	25	-	10,0	12,2	11	-	28,0	1,07	
<b>596 U-30</b>	596	1 1/2"	60	30	-	13,0	16,0	16	-	36,6	1,27	
<b>613 U-30</b>	613	1 3/4"	65	30	-	16,0	18,0	17	-	40,0	1,24	
<b>652 U-30</b>	652	2"	70	30	-	16,0	20,0	20	-	44,6	1,34	

Anm. Reservation för ändrade mått.



## NONFRIC® profillister för kedjor



TYP CF



TYP CT



TYP CU



TYP CK




TYP CKG

Standardlängd 2 meter (Nonfric®-profillist). Stålskenorna har en standardlängd på 6 meter.

KEDJE-TEKNIK NONFRIC® profillist nr	C-profil nr –	För kedja		Mått					Vikt inkl. C-profil kg/m
		nr –	delning tum	H mm	Hc mm	B mm	b mm	h mm	
<b>TYP CT</b>									
455-CT-15	3	455	3/8"	14	17	17	5,4	1,5	0,81
332-CT-10	1	332	1/2"x3/16"	10	11	20	4,5	1,5	0,43
332-CT-15	3	332	1/2"x3/16"	14	17	17	4,5	1,5	0,81
462-CT-10	1	462	1/2" (std)	10	11	20	7,4	2,2	0,43
462-CT-15	3	462	1/2" (std)	14	17	17	7,4	2,2	0,81
501-CT-15	3	501	5/8"	14	17	17	9,3	2,6	0,82
513-CT-15	3	513	3/4"	14	17	20	11,3	2,4	0,83
548-CT-15	5	548	1"	14	18	24	16	3,5	1,23
563-CT-15	5	563	1 1/4"	14	18	28	18	4,2	1,23
596-CT-25	9	596	1 1/2"	23	30	33	24	5,5	2,63
613-CT-25	9	613	1 3/4"	23	30	38	30	6,8	2,29
652-CT-25	9	652	2"	23	30	38	30	7,7	2,29
<b>TYP CF</b>									
CF 1	1			5	6	20	-	1,0	0,35
CF 2	1			10	11	20	-	5,8	0,45
CF 3	3			10	14	20	-	4,0	0,79
CF 4	3			14	17	20	-	7,0	0,88
CF 5	3			16	20	20	-	10,0	0,94
CF 6	5			10	15	28	-	3,0	1,18
CF 7	5			14	18	28	-	6,0	1,32
CF 8	9			12	22	38	-	4,0	2,22
CF 9	9			18	25	38	-	7,0	2,52
CF 10	12			20	30	60	-	10,0	3,31
CF 11	4			18	20	50	-	10,0	2,29
CF 12	6			18	20	80	-	10,0	2,71

### C-profil (endast stålprofil) (se även sid 242:1)

C-profil nr	A mm	B mm	C mm	D mm
C 1*	24	5,2	17,5	1
C 3*	20	10	10	1,5
C 4	50	10	35	2
C 5*	28	12	14	2
C 6	80	10	65	2
C 7	28	16	14	2,5
C 9	38	18	22	2,5
C 10*	30	24	20	1,5
C 11	45	40	31	2,0
C 12	60	20	36	2,5
C 13	65	55	40	3,0

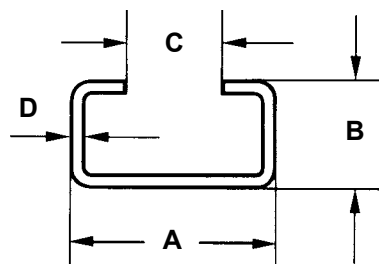

\*Lagerförs också i rostfritt stål.


C-profilerna är som standard av förzinkat stål.

Standardlängd 6 meter (avser stålprofilerna).

Anm. Reservation för ändrade mått.



## NONFRIC® profillister för kedjor

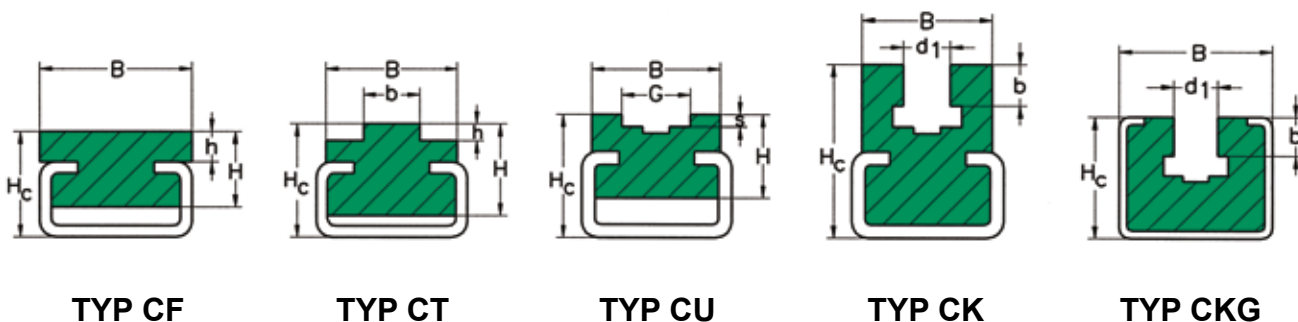

Standardlängd 2 meter (Nonfric®-profillist). Stålskenorna har en standardlängd på 6 meter.

KEDJE-TEKNIK NONFRIC® profillist nr	C-profil nr	För kedja		Mått							Vikt inkl. C-profil kg/m
		nr	delning tum	H mm	Hc mm	B mm	b mm	G mm	s mm	d <sub>1</sub> mm	
<b>TYP CU</b>											
455-CU-12	3	455	3/8"	14	17	20	-	9,4	2,8	-	0,75
462-CU-10	1	462	1/2"	10	11	20	-	12,8	3,5	-	0,42
501-CU-12	5	501	5/8"	12	18	24	-	15,4	3,6	-	1,13
513-CU-12	5	513	3/4"	12	18	24	-	17,0	3,9	-	1,13
548-CU-20	9	548	1"	20	30	33	-	24,0	8,4	-	2,28
563-CU-25	12	563	1 1/4"	25	35	60	-	28,0	10,0	-	3,22
596-CU-30	12	596	1 1/2"	30	40	60	-	36,6	13,0	-	3,52
613-CU-40	12	613	1 3/4"	38	45	65	-	40,0	16,0	-	4,02
652-CU-40	12	652	2"	38	45	70	-	44,6	16,0	-	4,22
<b>TYP CK</b>											
455-CK	3	455	3/8"	-	21	20	5,5	-	-	6,6	0,92
462-CK	7	462	1/2"	-	32	24	7,4	-	-	8,9	1,79
501-CK	7	501	5/8"	-	32	24	9,3	-	-	10,6	1,72
513-CK	9	513	3/4"	-	43	32	11,3	-	-	12,4	2,88
548-CK	9	548	1"	-	50	40	16,0	-	-	16,4	2,72
563-CK	12	563	1 1/4"	-	55	60	18,0	-	-	20,0	4,82
596-CK	12	596	1 1/2"	-	65	60	24,0	-	-	27,0	5,02
613-CK	12	613	1 3/4"	-	80	70	30,0	-	-	30,0	6,22
652-CK	12	652	2"	-	80	70	30,0	-	-	31,0	6,22
<b>TYP CKG</b>											
455-CKG	10	455	3/8"	-	24	30	5,5	-	-	6,6	1,28
462-CKG	10	462	1/2"	-	24	30	7,4	-	-	8,9	1,28
501-CKG	10	501	5/8"	-	24	30	9,3	-	-	10,6	1,28
513-CKG	10	513	3/4"	-	24	30	11,3	-	-	12,4	1,28
548-CKG	11	548	1"	-	40	45	16,0	-	-	16,4	3,11
563-CKG	11	563	1 1/4"	-	40	45	18,0	-	-	20,0	3,00
596-CKG	13	596	1 1/2"	-	55	65	24,0	-	-	27,0	6,23
613-CKG	13	613	1 3/4"	-	60	65	30,0	-	-	30,0	5,83
652-CKG	13	652	2"	-	60	65	30,0	-	-	31,0	5,73

Anm. Reservation för ändrade mått.

